


Item # PL-630, PHOTOINITIATOR BLEND

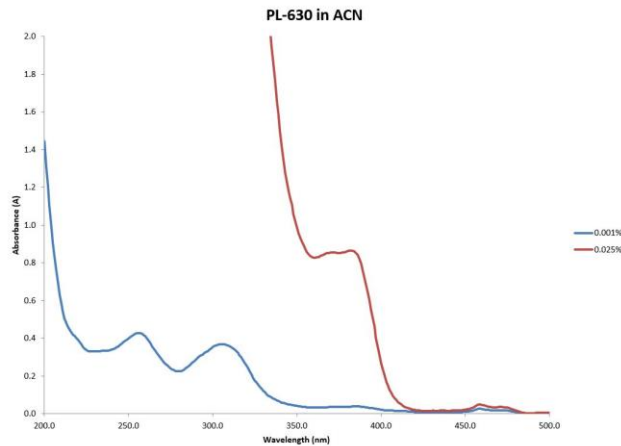

PL-630 is a low viscosity liquid photoinitiator blend developed specifically for pigmented UV and LED curable coatings and gels. PL-630 is soluble in most monomers, oligomers and pre-polymers. It is insoluble in H₂O.

Typical Applications: Specifically designed for pigmented systems.

Performance Properties:

- Very fast curing
- Excellent through and surface cure
- UV or LED Systems
- Easy to use liquid

TYPICAL PROPERTIES

Appearance	Amber Liquid
UV peaks	256m, 304nm 383nm
Viscosity @ 25C, cps	100
Usage Levels	2% – 8%
Specific Gravity	1.14

All Information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation. 09/2016