


PL-6992: Triarylsulfonium Hexafluorophosphate Salts in Propylene Carbonate

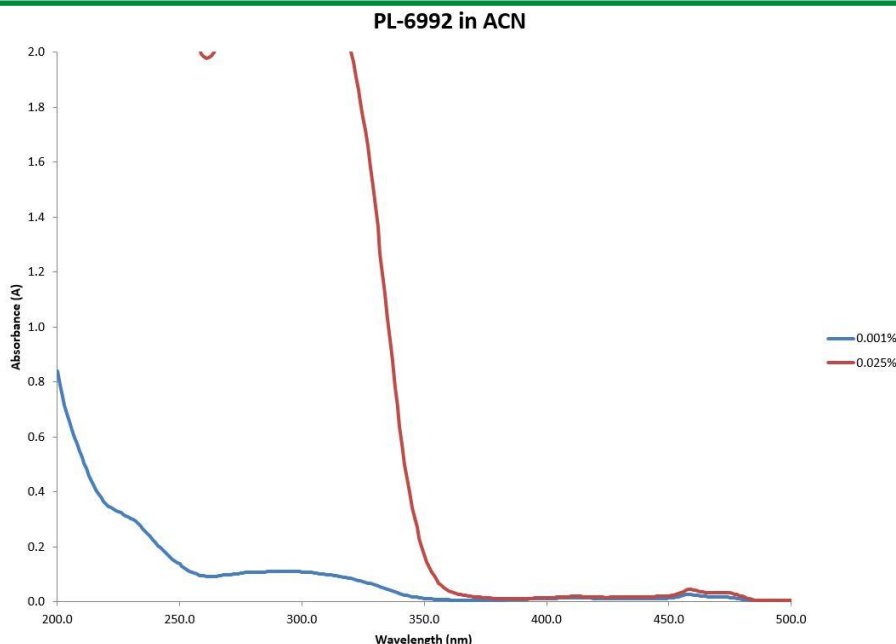

PL-6992 is a mixed aryl sulfonium salt cationic photoinitiator. It is very fast curing and easy to work with. It is soluble in most cycloaliphatic epoxies as well as vinyl ethers and other vinyl terminated monomers but insoluble in H₂O.

Typical Applications: Coatings for graphic arts, wood, plastics, metals.

Performance Properties:

- Very fast curing
- Good in metal applications

TYPICAL PROPERTIES

Appearance	Pale yellow liquid
Viscosity @ 25°C (cps)	75
Specific Gravity	1.32 g/mL
Odor	Faint, characteristic
Usage Levels	1.0 – 8.0%

All Information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation. 09/2016