


Item # PL-BPO, Benzophenone

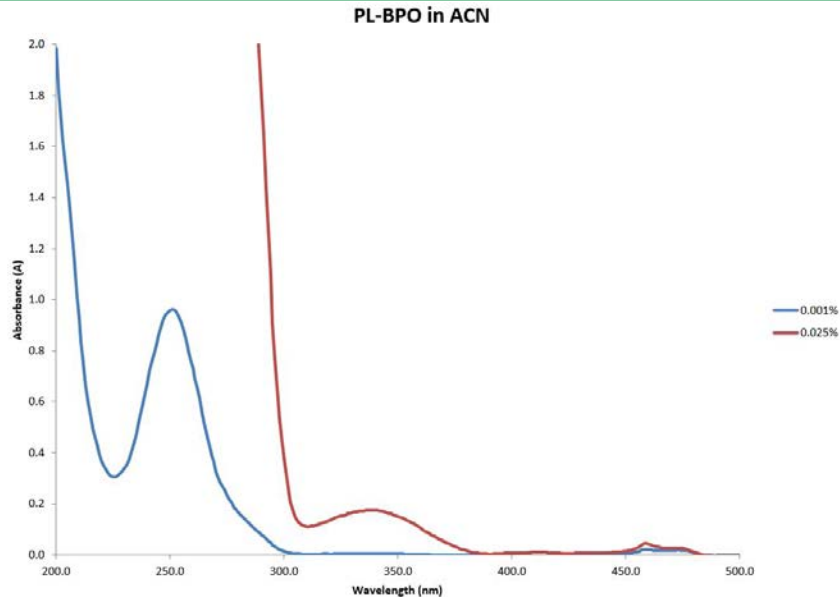

Benzophenone is a fast curing type-II photoinitiator. In the presence of O₂, the use of an amine co-initiator is recommended. It is soluble in most monomers, oligomers and pre-polymers. It is insoluble in H₂O.

Typical Applications: Coatings for graphic arts, wood, plastics, metals and optical fiber. Flexo, screen, litho, dry offset and inkjet. Adhesives.

Performance Properties:

- Very fast curing
- Excellent hardness

TYPICAL PROPERTIES

Appearance	Off white flakes
Molecular Formula	C13H10O
Molecular Weight	182.2
Melt point	48°C
Boiling point	305°C
Specific Gravity	1.10 g/mL
Abs. Peaks	254
Usage Levels	1.0 – 8.0%

All Information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation. 09/2016