


Item #: PL-PBZ

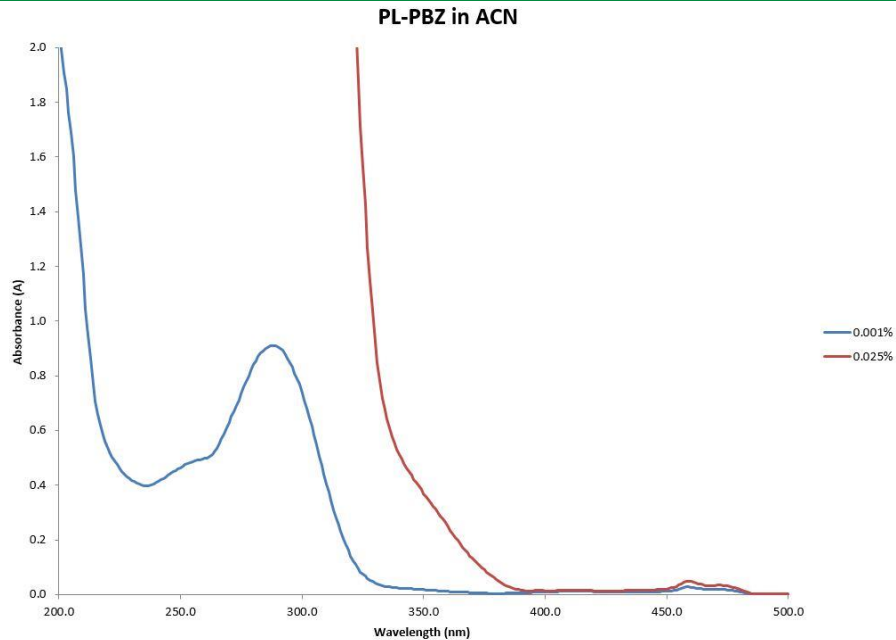

PL-PBZ is a fast curing type II photoinitiator. Tertiary amine synergists are recommended to further increase curing efficiency.

Typical Applications: Coatings for graphic arts, wood, and plastics. Flexo, screen, litho, overprint varnishes, dry offset, and inkjet.

Performance Properties:

- Low odor
- Very fast cure speed
- Low yellowing

TYPICAL PROPERTIES

Appearance	Pale Yellow Crystal
Melting Point, °C	99-103
Abs. Peak, nm	288
Usage Levels, %	2-6

All Information contained in this data sheet is given in good faith and without liability. It is intended to serve only as guidance. Users are advised to conduct their own evaluation of the product to determine its proficiency into products and processes. Users should ensure that the use of the product complies with all applicable current legislation. 01/2017